



LINBLE
力必拓

4G industrial router

LBT-T300-T310-G

Product specification

Product overview

Product overview

T310-G industrial wireless router is a wireless communication product with excellent performance developed by Shenzhen Libiton Technology Co., Ltd. based on the demand of 4G network. It is mainly used in the data transmission business of industry users, supporting transparent data transmission, image transmission, equipment monitoring and wireless routing Internet access and other functions.

The T310-G uses an embedded high-performance CPU to effortlessly handle advanced applications such as routing and security, and can be paired with a variety of 4G industrial communication modules (TDD-LTE/FDD-LTE networks). Provide 10/100M Ethernet port, WIFI wireless interface and serial port. A variety of terminal devices can be docked.

Support WEB configuration mode, convenient and simple management, and support remote cloud control.

Field of

application:



Electricity



Petroleum



Coal mine



Finance



Communication



Public security



Heat



Industrial Control



Weather



Water Conservancy



Traffic



Municipal



Product

1. Ultra-small volume, length and width are only 96.4 * 67.5 * 30 mm;
- 2, industrial protection interface, easy to install;
3. Adopt metal shell with protection grade of IP30;
4. Wired + wireless router solution;
5. Support 802.11 B/G/n protocol, up to 300Mbps;
6. Wired support 1 WAN or 1 LAN, 10M/100M adaptive;
7. Software and hardware watchdog anti-crash design, after the router is disconnected, it will automatically power off and restart to ensure stable and reliable operation of the equipment;
8. automatic detection of network disconnection, automatic restart of dialing failure, timing restart and other functions;
9. Serial port transparent transmission function. The command control mode can be entered through the serial port to control the router and ancillary equipment;
10. Port mapping, DMZ host and other functions;
11. Support VPN (PPTP Client, L2TP Client);
12. Optional GNSS positioning module, supporting RTK technology and multiple satellite systems (GPS, GLONASS, Beidou, WAAS, EGNOS, MSAS, GAGAN) hybrid engine);

Functional overview

Functions overview

Software function

The way to surf the Internet	4G dial-up DHCP/Static IP/PPPoE
Number of users supported	Wired: 253, Wireless: 30
Operating system requirements	Windows XP/VISTA Linux 2.6 Windows 7 and above MAC OS: 10.3.7 and above
Browser requirements	IE: 6.0 and above Safari: 1.2.4 and above Firefox: 2.0.0.8 and above
Security management	Set up a firewall to prevent malicious attacks from the Internet on computers in the LAN. MAC filtering: prohibit MAC addresses that have been added. Access control: Control the access of computers in the LAN to the Internet. Port blocking: Block certain viruses from continuously initiating connections through a certain port to prevent Dos attacks.
System Services	Virtual server: Set an internal server for Internet users to access DMZ: When the open port of the virtual server to be set is uncertain, it can be set as a DMZ host Port triggering: The wireless router can automatically open the inward service port according to the port of the LAN accessing the Internet. Serial port service: realize serial port data transmission, AT command control and other functions
Equipment management	Locale NTP server settings Back up system setup information Recover Settings Information from File the password and restore to the factory settings Software upgrade Remote management Restart Change the password and restore to the factory settings
WLAN security mode	Open System WPA-PSK WPA2-PSK WPAPSK WPA2PSK (ie WPA-PSK and WPA2-PSK mixed mode) WPA1WPA2 (i.e. WPA and WPA2 mixed mode)

Hardware parameters

Wireless interface	IEEE802.11b/g/n
Operating frequency band	2400-2483.5MHz
Antenna	SMA external rotation and internal hole
WIFI transmission rate	300Mbps (MAX)
External interface	LAN port: 2 (LAN1 is WAN/LAN adaptive) RS232/485 interface: 1 SIM card slot: 1 Antenna connector: 1-4 (optional) Indicator light: 4 DC power supply interface: 1 reset key: 1
WiFi data	802.11n: -66dBm at 300Mbps/HT40 MCS7 :+15.5dBm 802.11b: -86dBm at 11Mbps/CCK: +18 dBm 802.11g: -73dBm at 54Mbps/OFDM: +15.5dBm
Frequency band supported (optional)	GN (Domestic-Default): FDD-LTE B1/3/5/8 TDD-LTE B38/39/40/41 Europe FDD-LTE B1/3/5/7/8/20 TDD-LTE B38/39/40/41 North America (NA) FDD-LTE B2/3/4/5/7/8/12/13/17/25/26/66 TDD-LTE B41 Global FDD-LTE B1/2/3/4/5/7/8/17/20/28 TDD-LTE B38/39/40/41
Storage memory	Store 8 MB Memory 64MB
Overall dimensions	Length, width and height: 96.4 * 67.5 * 30 mm (excluding antenna interface)
Power source	DC power supply: 12-24V/1A (optional 12/24 V)
Power consumption (current)	Less than 400mA
Work environment	Operating temperature: -20 ° C ~ + 70 ° C Storage temperature: -40 ° C ~ + 80 ° C Humidity: 5% ~ 95%, non-condensing

Interface description

Interface specification

Side a, side B



Side A


1. LAN1/LAN2: RJ45 interface; In standard router mode, LAN1 can be used as a WAN port.
2. DC power interface: 2.1mm round head power interface, positive inside and negative outside, voltage input:
12V-24 (optional), the recommended input power is more than 10W.
3. Indicator light: LAN1/LAN2: wired network access indicator light, which is always on when the connection is normal and flashes when there is data traffic. SYS lamp: it is always on after power on, and it flashes slowly when the system is started normally. Flash when the reset key is pressed. LINK light: In 4G or WIFI bridging mode, it flashes when dialing (bridging AP), and it is always on after

Side B

1. 4G/WIFI antenna interface: SMA external rotation and internal hole interface.
2. R (reset) key: press this key for 5 seconds in the power-on state, the SYS light will flash quickly, and then restart, and the reset is successful.
3. RS232/RS485 serial interface: 2.0m 4 PIN connector.
4. SIM card slot: snap-in SIM card holder. If you need to take out the SIM card, gently push the SIM card.

Schematic diagram of shell locating holes

Schematic diagram of positioning hole of shell

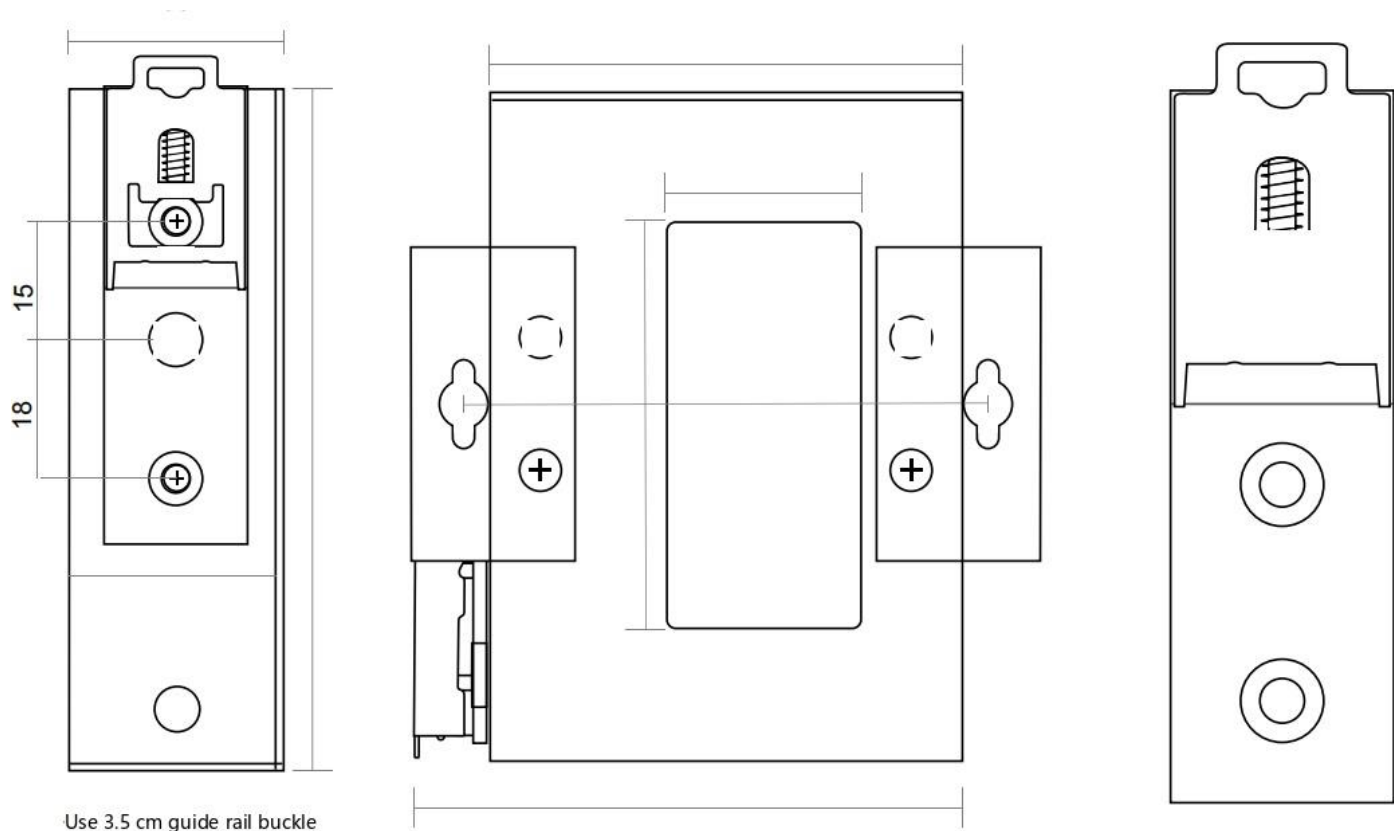

The product pictures, videos and screen contents on the above pages are only for illustration. The physical product effect (including but not limited to appearance, color and size) and screen display content (including but not limited to background, UI, pictures and videos) may be slightly different. Please refer to the physical product. The data in the above pages are theoretical values, which are from the internal laboratory. The actual use may be slightly different due to individual differences, software versions, use conditions and environmental factors. Please refer to the actual use.

Due to the real-time change of product batch and production supply factors, in order to provide accurate product information, specification parameters and product characteristics as far as possible, we may adjust and revise the text expression, picture effect and other contents in the above pages in real time to match the actual product performance, specification, index, parts and other information. If it is necessary to make the above modifications and adjustments, no special notice will be given.

The manufacturer shall make every effort to ensure the accuracy of the information provided, but shall not be liable for any errors or omissions that may exist.